





Industrial Fans & Blowers

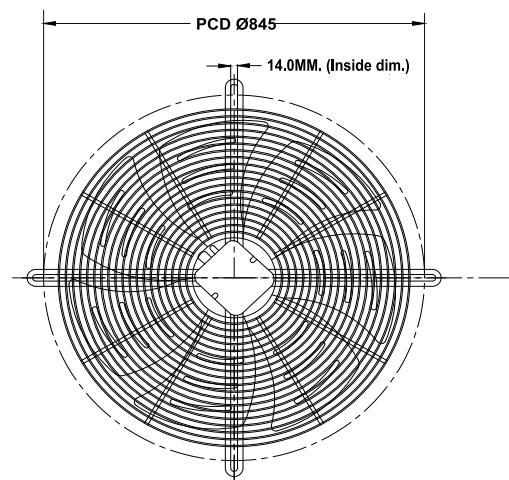

TECHNICAL DATA SHEET

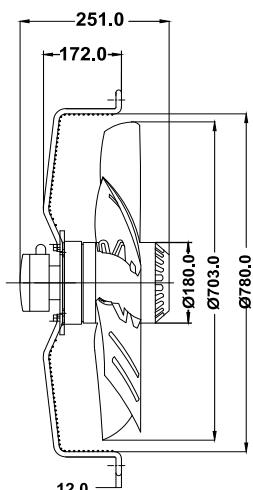

NOTE:- ALL DIMENSION ARE IN MM.


SPECIFICATIONS (50 Hz)

Volt (V)	Frequency (Hz)	Watts (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Air Vol. (m³/hr)	Air Vol. (CFM)	Noise (dBA)	Nt. Wt. (Kg)
415△	50	1150	1.80	900	—	16000	9425	76	27.0
415Y	50	750	1.20	680	—	13000	7660	65	

MECHANICAL CHARACTERISTIC


Blade	Steel, Powder Coated
Grill	Steel, Powder Coated
Rotor	Powder Coated
Housing	Steel, Powder Coated In Black
Type Of Protection	IP-54
Motor Protected	Thermally Protected
Insulation Class	"F"
Bearing	Maintenance Free Ball Bearing
Permissible Ambient Temperature	-30° To +60°C
High Voltage Test According to IS	3588-1987
Direction Of Rotation	Sucking-counter Clockwise, Blowing-clockwise Seen On Rotor, Fans Conform 6.3 Grade As Recommended By IS 1940-1-2003
Balancing Grade	

PERFORMANCE CURVE

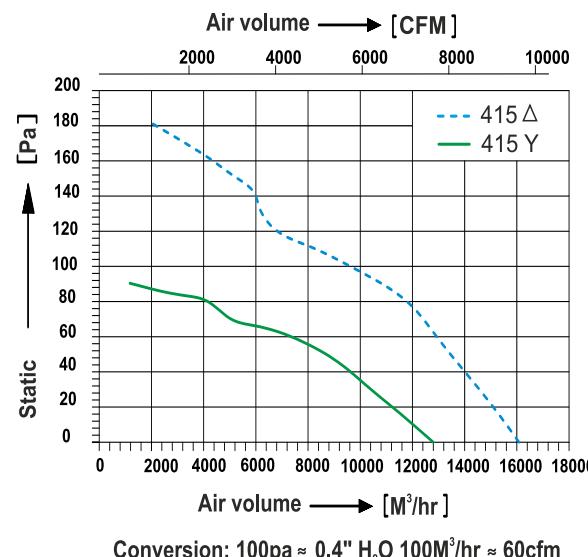


WIRING DIAGRAM

△ (Delta connection)

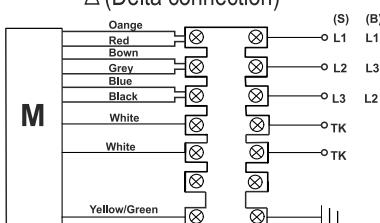

Y (Star connection)

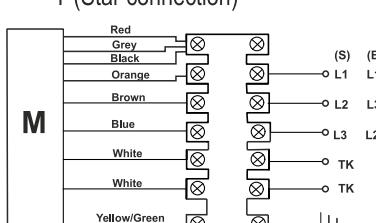

DRAWN BY	V.J.P	TITLE:- MODEL : AF710-6D-F7
CHECKED BY	J.G.P	
APPROVED BY	S.B.D	
SCALE N.T.S.	SHEET 1 OF 1	
REV/DATE:	00, 21.12.2025	