

NOTE:- ALL DIMENSION ARE IN MM.


SPECIFICATIONS (50 & 60 Hz)

Volt (V) ±10%	Frequency (Hz)	Watt (W) ±10%	Current (A) ±10%	Speed (RPM) ±200	Capacitor (µF)	Air Vol. (m ³ /hr)	Air Vol. (CFM)	Noise (dBA)	Nt. Wt. (Kg)
230	50	290	1.20	2450	8.00	1300	765	70	7.8


MECHANICAL CHARACTERISTICS

Impeller	Steel, Powder Coated
Housing	G.I, Powder Coated
Type Of Application	S1 Continuous Duty
Ingress Protection Rating	IP-44
Insulation Class	"F"
Bearing	Maintenance Free Ball Bearing
Permissible Ambient Temperature	-30° To +60°C
Manufacturing Standard	EN-60335-1
Testing Standard	IS-4894-1987
Balancing Grade	IS-1940-1-2003, Grade 6.3
Noise	A-weighted overall sound power level Distance of 2 meter
Product Life	30,000 hours (At 40°C)

PERFORMANCE CURVE

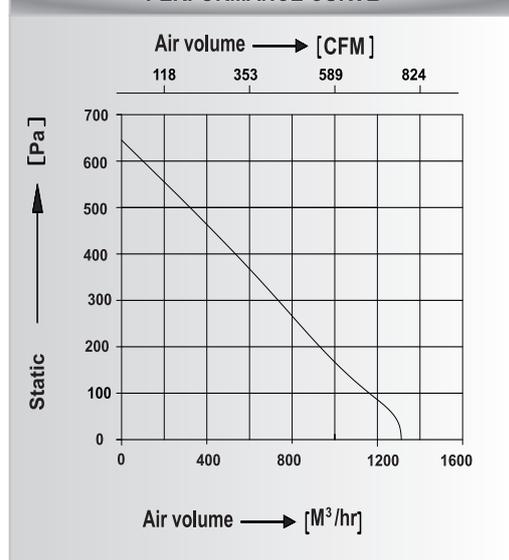

WIRING DIAGRAM

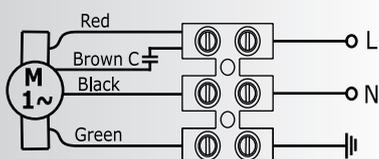

Note:-

- 1) All Information contained in this document is confidential and the property of ROTECH. Reproduction of this in any form is to be done with the specific permission of the company
- 2) In view of continuous improvement and upgradation of products, the design, the specification, dimensions and information contained herein are subject to change without notice.