



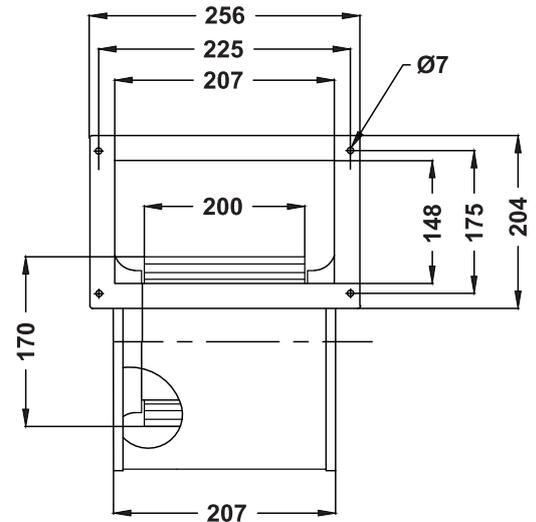

Industrial Fans & Blowers

PRODUCT SPECIFICATIONS

DI200-4D-M5

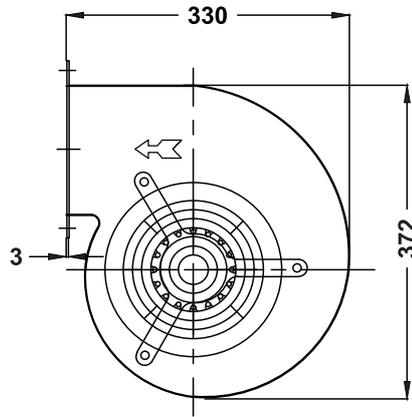

NOTE:- ALL DIMENSION ARE IN MM.


SPECIFICATIONS (50 Hz)

| Volt (V) ±10% | Frequency (Hz) | Watt (W) ±10% | Current (A) ±10% | Speed (RPM) ±100 | Capacitor (µF) | Air Vol. (m ³ /hr) | Air Vol. (CFM) | Noise (dBA) | Nt. Wt. (Kg) |
|------------------|----------------|------------------|---------------------|---------------------|----------------|-------------------------------|----------------|-------------|--------------|
| 415 | 50 | 360 | 0.78 | 1400 | — | 1550 | 912 | 65 | 15.0 |


MECHANICAL CHARACTERISTICS

| | |
|---------------------------------|---|
| Impeller | G.I, Zinc Plated |
| Housing, Grill | Steel Powder Coated |
| Type Of Application | S1 Continuous Duty |
| Ingress Protection Rating | IP-54 |
| Insulation Class | "F" |
| Bearing | Maintenance Free Ball Bearing |
| Permissible Ambient Temperature | -30° To +60°C |
| Manufacturing Standards | EN-60335-1 |
| Testing Standards | IS-3588-1987 |
| Balancing Grade | IS-1940-1-2003, Grade 6.3 |
| Noise | A-weighted overall sound power level Distance of 2 meter |
| Product Life | 30,000 hours (At 40°C) |

PERFORMANCE CURVE

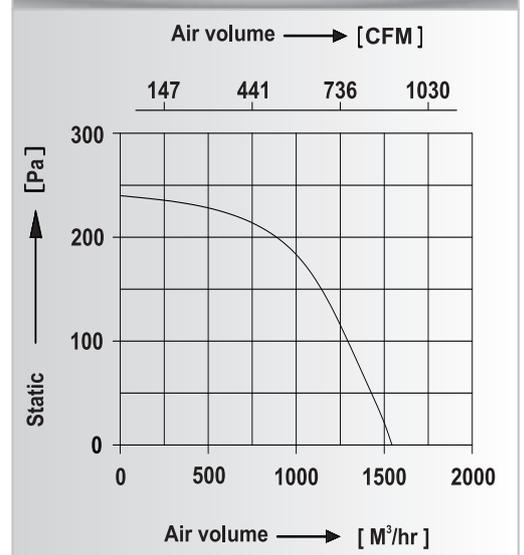

WIRING DIAGRAM

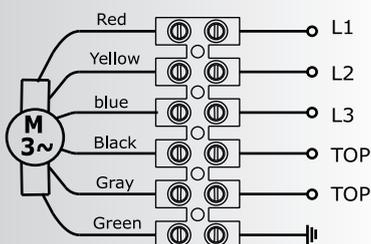

www.rotechfans.in

Note:-

- All Information contained in this document is confidential and the property of ROTECH. Reproduction of this in any form is to be done with the specific permission of the company
- In view of continuous improvement and upgradation of products, the design, the specification, dimensions and information contained herein are subject to change without notice.