
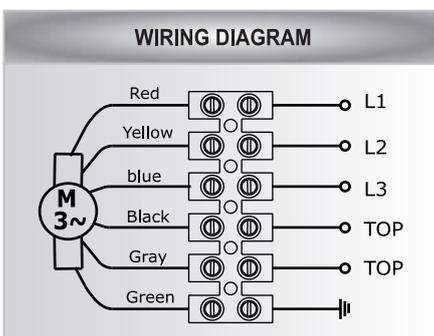


**NOTE:- ALL DIMENSION ARE IN MM.**

SPECIFICATIONS (50 & 60 Hz)									
Volt (V) ±10%	Frequency (Hz)	Watt (W) ±10%	Current (A) ±10%	Speed (RPM) ±100	Capacitor (µF)	Air Vol. (m <sup>3</sup> /hr)	Air Vol. (CFM)	Noise (dBA)	Nt. Wt. (Kg)
415	50	900	1.60	1350	---	3500	2060	71	20.0
	60	1190	2.15	1400		3700	2178	73	

MECHANICAL CHARACTERISTICS	
Impeller	G.I, Zinc Plated
Housing, Grill	Steel Powder Coated
Type Of Application	S1 Continuous Duty
Ingress Protection Rating	IP-54
Insulation Class	"F"
Bearing	Maintenance Free Ball Bearing
Permissible Ambient Temperature	-30° To +60°C
Manufacturing Standards	EN-60335-1
Testing Standards	IS-3588-1987
Balancing Grade	IS-1940-1-2003, Grade 6.3
Noise	A-weighted overall sound power level Distance of 2 meter
Product Life	30,000 hours (At 40°C)

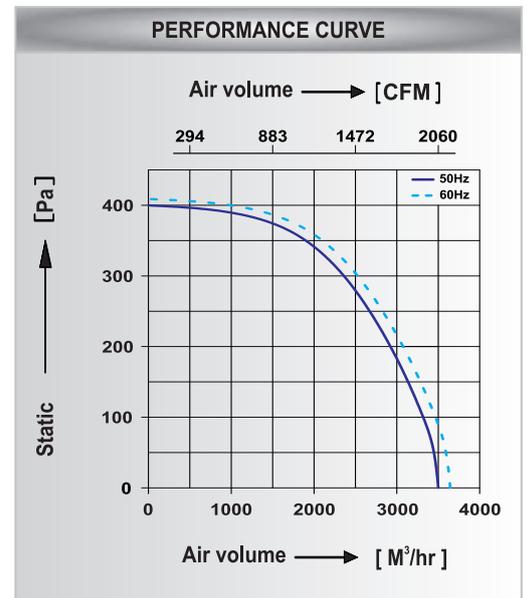

**Note:-**

- 1) All Information contained in this document is confidential and the property of ROTECH. Reproduction of this in any form is to be done with the specific permission of the company
- 2) In view of continuous improvement and upgradation of products, the design, the specification, dimensions and information contained herein are subject to change without notice.